
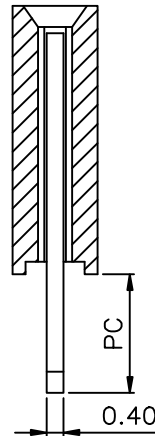
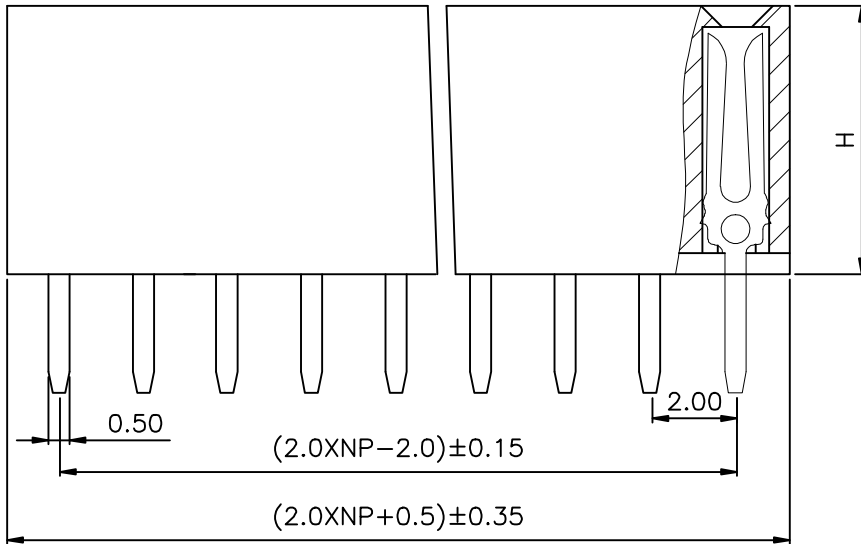


# HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

### Specifications

- 1.Current Rating:2Amps
- 2.Contact Resistance: 20mΩ
- 3.Insulator Resistance:1000 Megohms min.
- 4.Dielectric withstanding Voltage: AC/DC 500V
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: phosphor Bronze
- 7.Insulator Material:Asfollows
- 8.Plated: Asfollows




### Ordering Information

L305 XX -XX 0 X X XX X

Insulation Height*Wide (H*W) Option:	NO. of Pins Per Row: 1-40P	Insulation Material Option:	Contact Plating	Serial NO.	Packing
63-6.35*2.0		1=PBT 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	01-69(No pillars) 70-89(pillars) 90-99(outside pillars)	A=PE Bag B=Tube C=Tray D=Reel

#### Dimension antitheses list

ITEM	PC	H	W
Standard	2.4/2.8	6.35	2.0
Alternate			

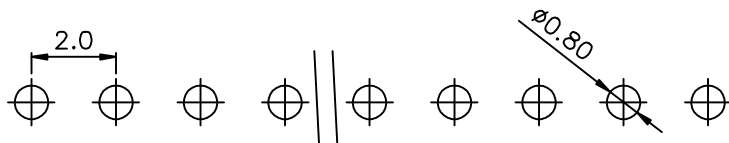

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD					
TITLE	PH2.0mm H6.35mm 1XNP 180° Single row Female Header Y Type	DRAWN BY	Lujunhui	18.04.01	
PART NO	L305XX-XX0XXXXX	CHECKED BY			
DRAWING NO		APPROVED BY			
SCALE	1:1	UNIT	mm	PAGE	1/1
				SIZE	A4