
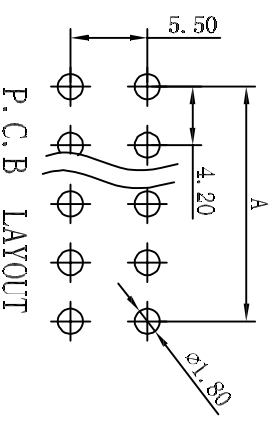
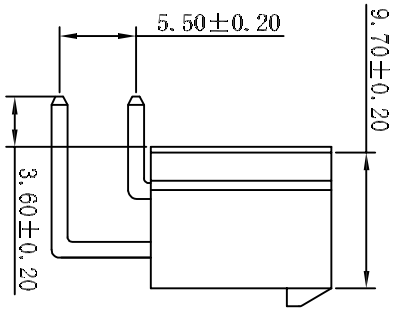
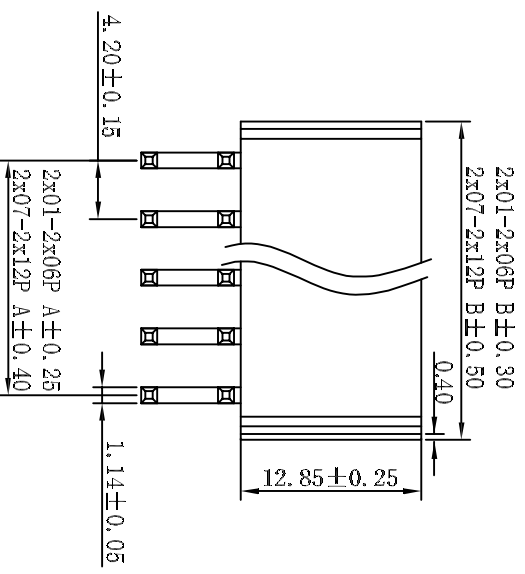
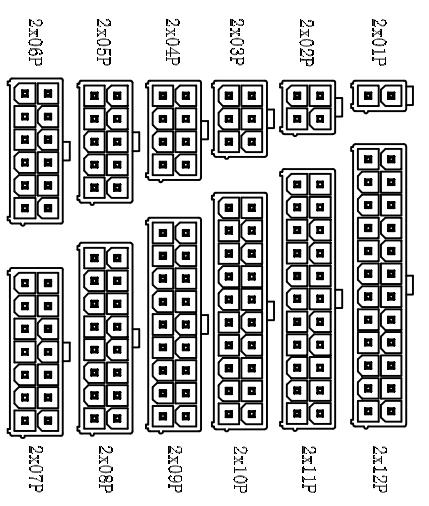


HSE ROHS


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

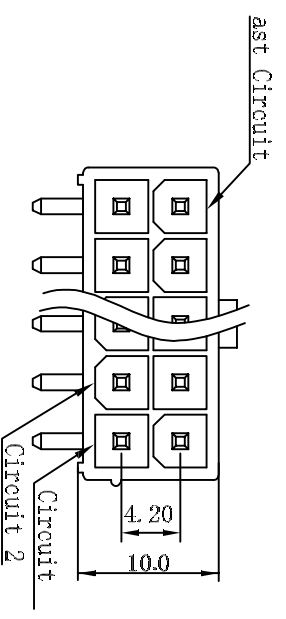

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
0 ±0.30	0° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

Ordering Information

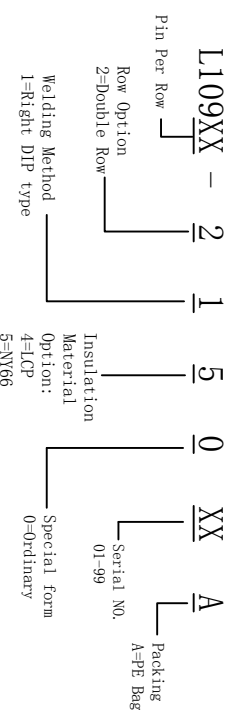

- Note:
- Material
 - Housing: NY66, Color:White
 - Contact: Brass,Tin.
 - Rating:
 - Operating Voltage: 600V AC/DC.
 - Current Rating: 7A AC/DC.
 - Operating Temperature:-25°C~+85°C.
 - Contact Resistance:30 mΩ max.
 - Insulation Resistance:1000 MΩ min.
 - Dielectric withstanding Voltage: AC 1500V
 - Part Number:

LDCONN 东莞连大精密制品有限公司
 Dongguan LianDa Precision Products Co., LTD

TITLE	PH4.2mm Wefer Double Row, DIP Right type	DRAWN BY	WZG	17.03.30
PART NO	L109XX-2150XXA	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE
				1/1
				SIZE
				A4