
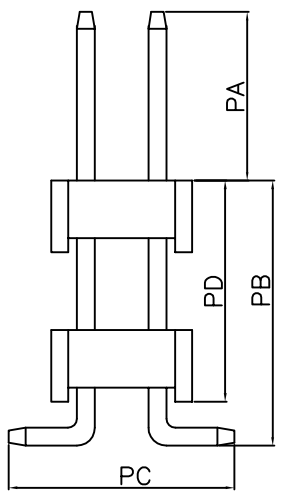
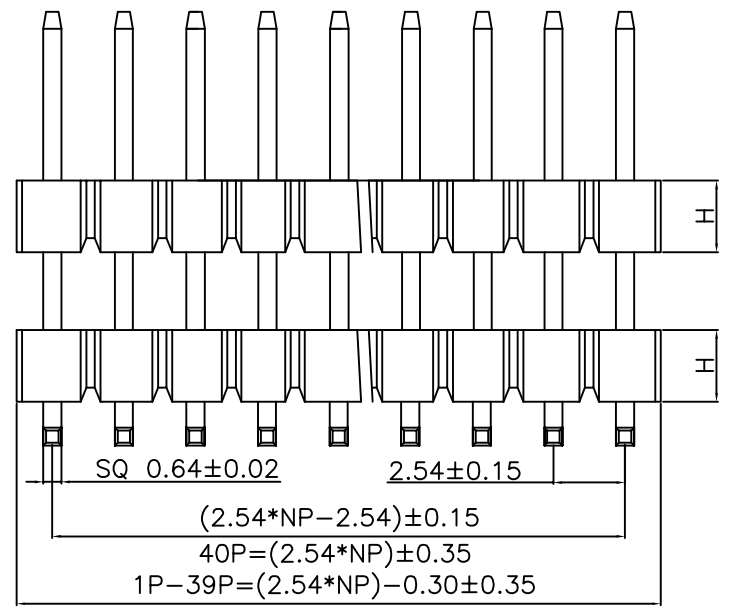


HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

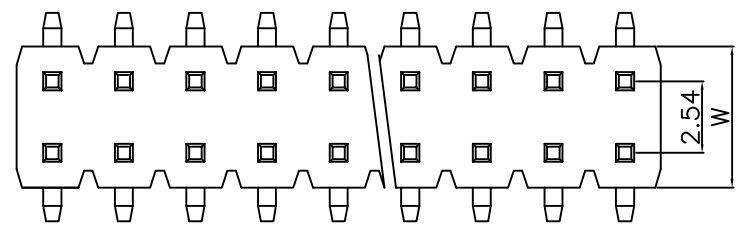


- Specifications
- 1.Current Rating:3.0Amps
 - 2.Insulation Resistance:1000 MΩ min.
 - 3.Dielectric withstanding Voltage:1000V AC/DC
 - 4.Contact Resistance:20 mΩ max.
 - 5.Operating Temperature:-40°C to+105°C
 - 6.Contact Material: Brass
 - 7.Insulation Material:Asfollows,UL94V-0,Black
 - 8.Plated: Au Over Ni

Ordering Information

L208 XX -XX 2 X X XX X

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-40P	Insulation Material Option:	Contact Plating	Serial NO. 01-69	Packing
Option:					
10=1.0*2.0		1=PBT	0=0.8" Gold		A=PE Bag
15=1.5*2.3		2=PPS	1=Au1" Gold		B=Tube
25=2.54*5.0		3=NY6T	2=Au1.5" Gold		C=Tray
		4=LCP	3=Au2" Gold		D=Reel
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

ITEM	PD	PC	PB	PA	H	Pin Length
Standard	7.50	8.00	9.40	5.84	2.54	17.20
Alternate						

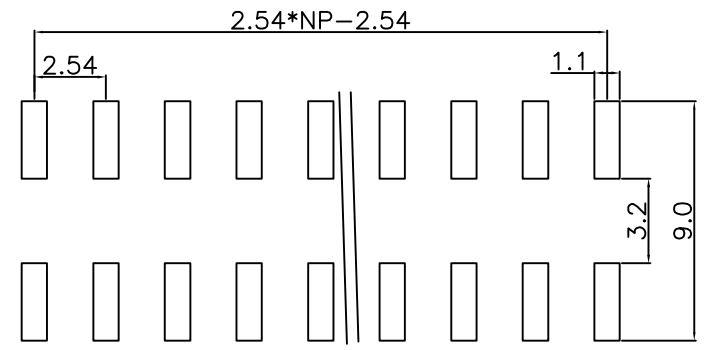

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司
 连大 DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.54mm Pin Header Dual Row SMT	DRAWN BY	YTT	16.02.03
PART NO	L20825-XX2XXXXD	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4