

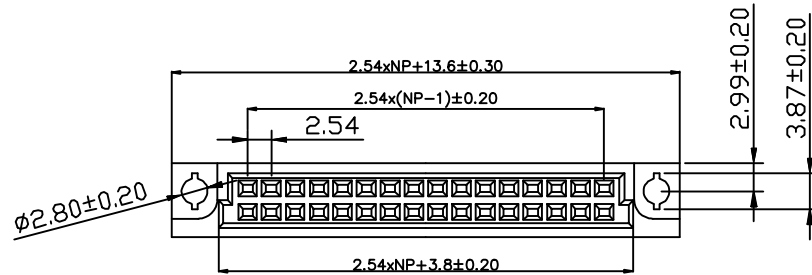


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

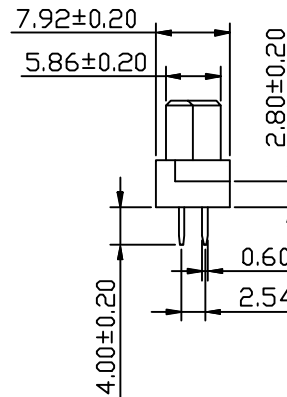

**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -55°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PBT

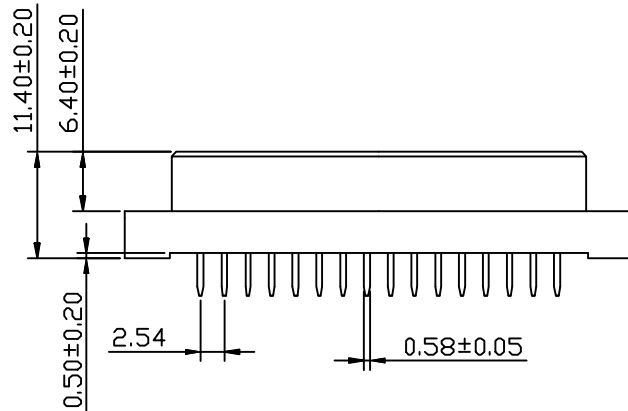

**Ordering Information**  
**L496XX - X X XX X**


NO. of Pins  
 Per Row:  
 1-50P

The product type  
 0、180°  
 1、90°  
 2、SMT  
 9、Welding line

Serial NO.  
 01-99

Contact Plating  
 0、Au0.8u"  
 1、Au1.0u"  
 7、half gold half tin plating  
 8、Bright tin plating

Packing  
 A=PE Bag  
 B=Tube  
 C=Tray  
 D=Reel

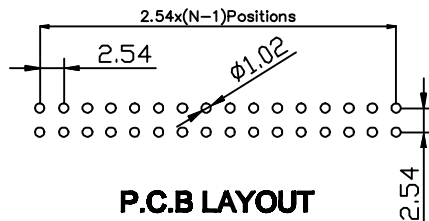

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司 连大 DongGuan LianDa Precision Products Co., LTD									
TITLE		FRZ. 64mm DIN 41612 Female Dual-row Straight Type		DRAWN BY		YTT		18.06.20	
PART NO		L496XX-07XXX		CHECKED BY					
DRAWING NO				APPROVED BY					
SCALE	1:1	UNIT	mm		PAGE	1/1	SIZE	A4	