

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

SPECIFICATIONS
Rated Current: 3.0AMP
Contact Resistance: 30mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -55°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester(UL94V-0)
Standard: PBT

Ordering Information
L495XX - X X XX X


NO. of Pins
Per Row:
1-50P

The product type
0、180°
1、90°
2、SMT
9、Welding line

Contact Plating
0、Au0.8u"
1、Au1.0u"
7、half gold half tin plating
8、Bright tin plating

Serial NO.
01-99

Packing
A=PE Bag
B=Tube
C=Tray
D=Reel

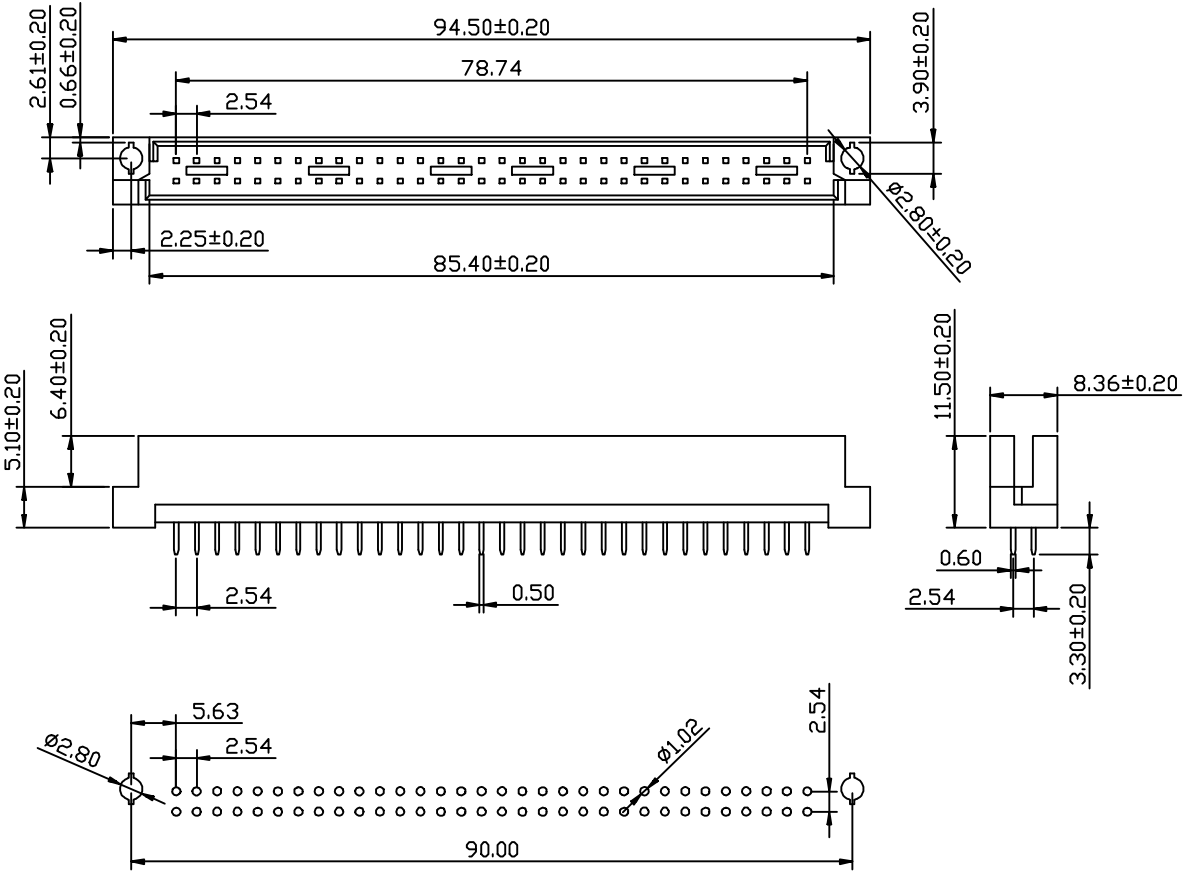

P.C.B LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD									
TITLE		FR2.54mm-J DIN 41612 Male Dual-row Straight Type		DRAWN BY		Lujunhui		18. 10. 30	
PART NO		L495XX-07XXX		CHECKED BY					
DRAWING NO				APPROVED BY					
SCALE	1:1	UNIT	mm		PAGE	1/1	SIZE	A4	