
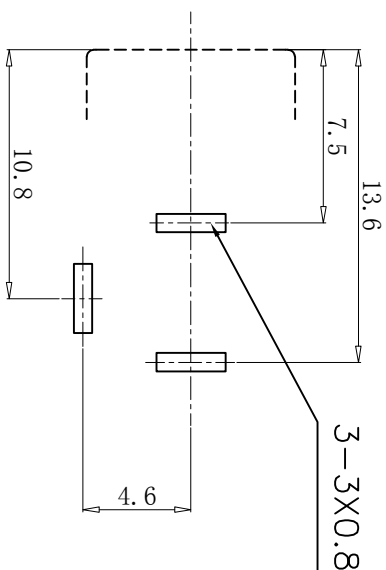
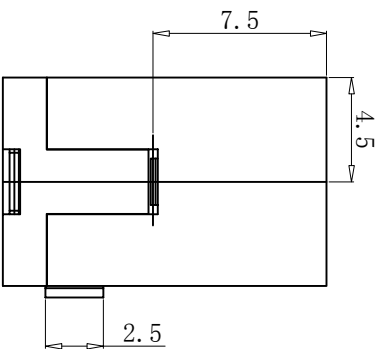


HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

SPECIFICATION

1. Rating: DC 30V 2.5A
2. Contact resistance: $\leq 0.03\Omega$
3. Insulation resistance: $\geq 100M\Omega$ (DC250V)
4. Withstand voltage: 500VAC
5. Insertion and extraction force: 3-25N
6. Life test: 5000 cycles.

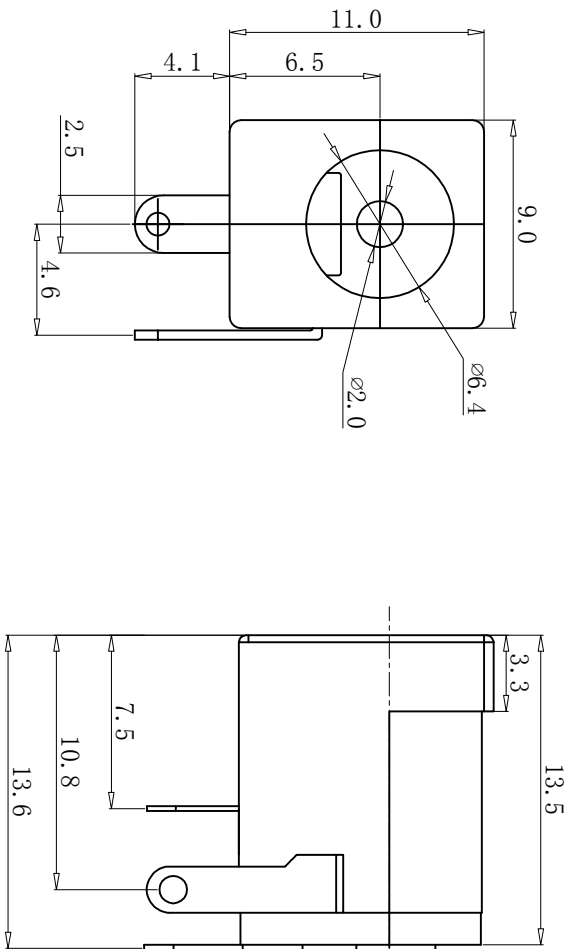

PCB LAYOUT


STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
0 ±0.30	0.° ±3°
.00 ±0.25	.0° ±2°
.000 ±0.15	.00° ±1°

Ordering Information

L781 20 - 64 1 2 XX X

Mandrel diameter 20=ø2.0MM
Hole Diameter 64=ø6.4MM
Welding method structure
1=Right Dip Type 2=Without Shell
Serial No. 01-99
Packing C=Tray D=Reel

SCHEMATIC



LDCONN 东莞连大精密制品有限公司
Dongguan LianDa Precision Products Co., LTD

TITLE	DRAWN BY	WZG	17.04.10
DC JACK-3P-Right-DIP Type, Without Shell			
PART NO	L78020-6412XXX	CHECKED BY	
DRAWING NO		APPROVED BY	
SCALE	1:1	UNIT	mm
		PAGE	1/1
		SIZE	A4