

# HSE ROHS

REV	REV NO	DESCRIPTION	DATE	NAME
1		NEW		

NOTE:

Material

Housing: Glass-reinforced Thermoplastic UL 94v-0

Contact: Copper

Contact Plating: Gold or Tin over Nickel

Electrical

Current rating: 2AMP




Dielectric Withstanding voltage: 500VAC

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Environmental


Temperature Range: -40°C to +105°C

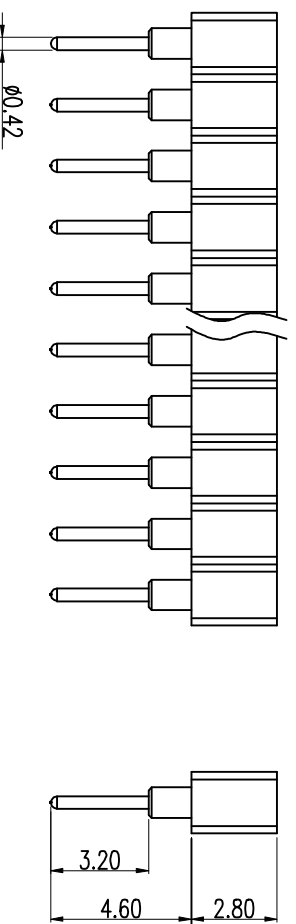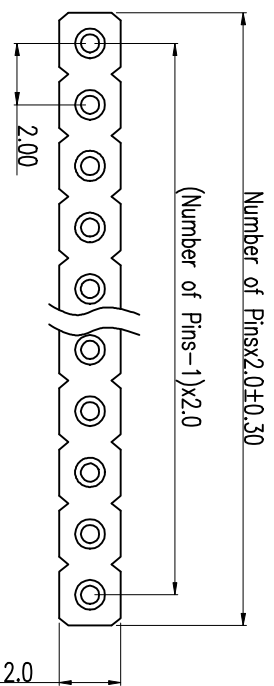

PCB LAYOUT

## Ordering Information

L489XX - X X XX X

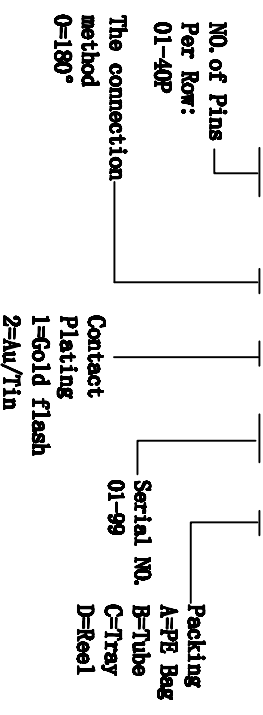

**LDCONN 东莞连大精密制品有限公司**

Dongguan Lianda Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)		ANGLES	
LINER		0.°	±3°
		.00 ±0.20	.0° ±2°
		.000 ±0.10	.00° ±1°

TITLE	DRAWN BY	DATE	NAME
For the Technical Product Order E-2's Single Line Standard Type			

PART NO	CHECKED BY
L489T-001X	

DRAWING NO	APPROVED BY

SCALE	UNIT	PAGE	1/1	SIZE
1:1	mm			A4