

HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 UL 94V-0
 Flammability: Brass C3804
 Contact: ZN.50
 Connecting pin: min500 cycles
 Mechanical life: 2A
 Rated current: Min 1000V RMS
 Dielectric strength: max 10mΩ
 Terminations:

Ordering Information

L489XX - X X XX X



NO. of Pins Per Row: 01-40P

The connection method
 0=180°
 1=90°
 2=SMT

Contact Plating
 1=Gold Flash
 2=Au/Tin

Serial NO. 01-99

Packing
 A=PB Bag
 B=Tube
 C=Tray
 D=Reel

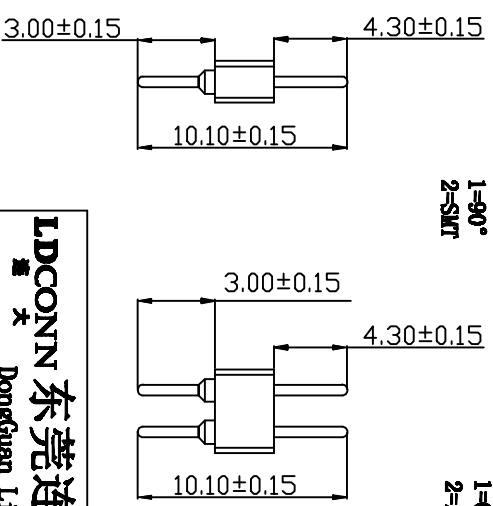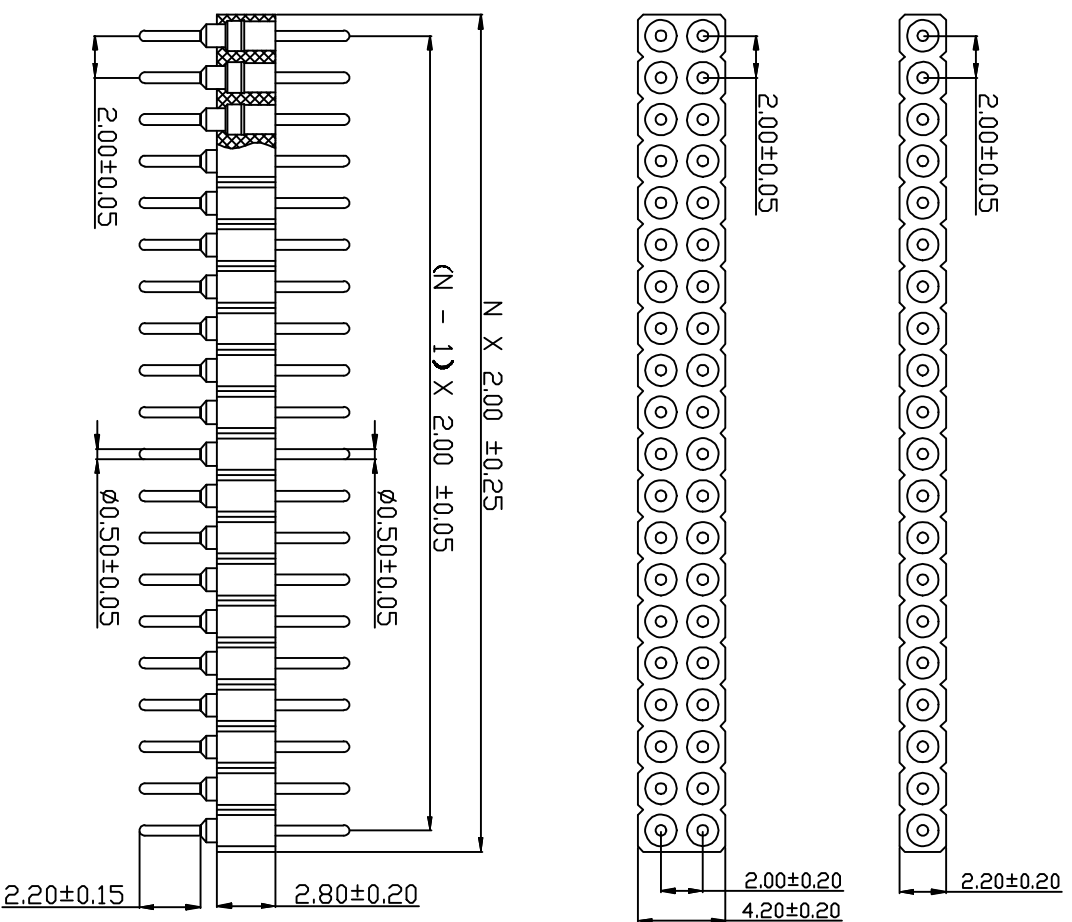

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINER	ANGLES
.0 ±0.30	0.°	±3°
.00 ±0.20	.0°	±2°
.000 ±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司		Dongguan Lianda Precision Products Co., LTD	
TITLE	FIG. 0m-1 Modified Male Header B=2.80 Single row/Double row 180° Type	DRAWN BY	Lu Junhui
PART NO	L489XX-0XXXX	CHECKED BY	
DRAWING NO		APPROVED BY	
SCALE	1:1	UNIT	mm
		PAGE	1/1
		SIZE	A4