



QA2503 Car connector

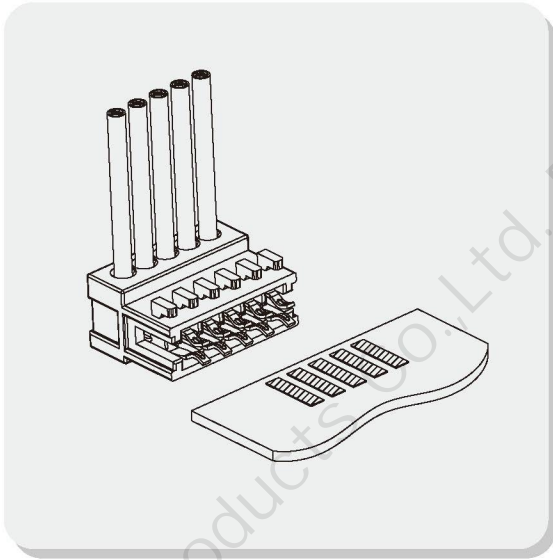

■ Specifications

- Contact resistance: $\leq 10\text{m}\Omega$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Rated voltage: 32V AC DC
- Rated current: 3.0A AC DC
- Withstand voltage: 1400V AC/minute
- Temperature range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Material: Pin: Copper alloy/Tin-plated
Wafer: High temperature plastic, UL94V-0

■ Mounting Measurement

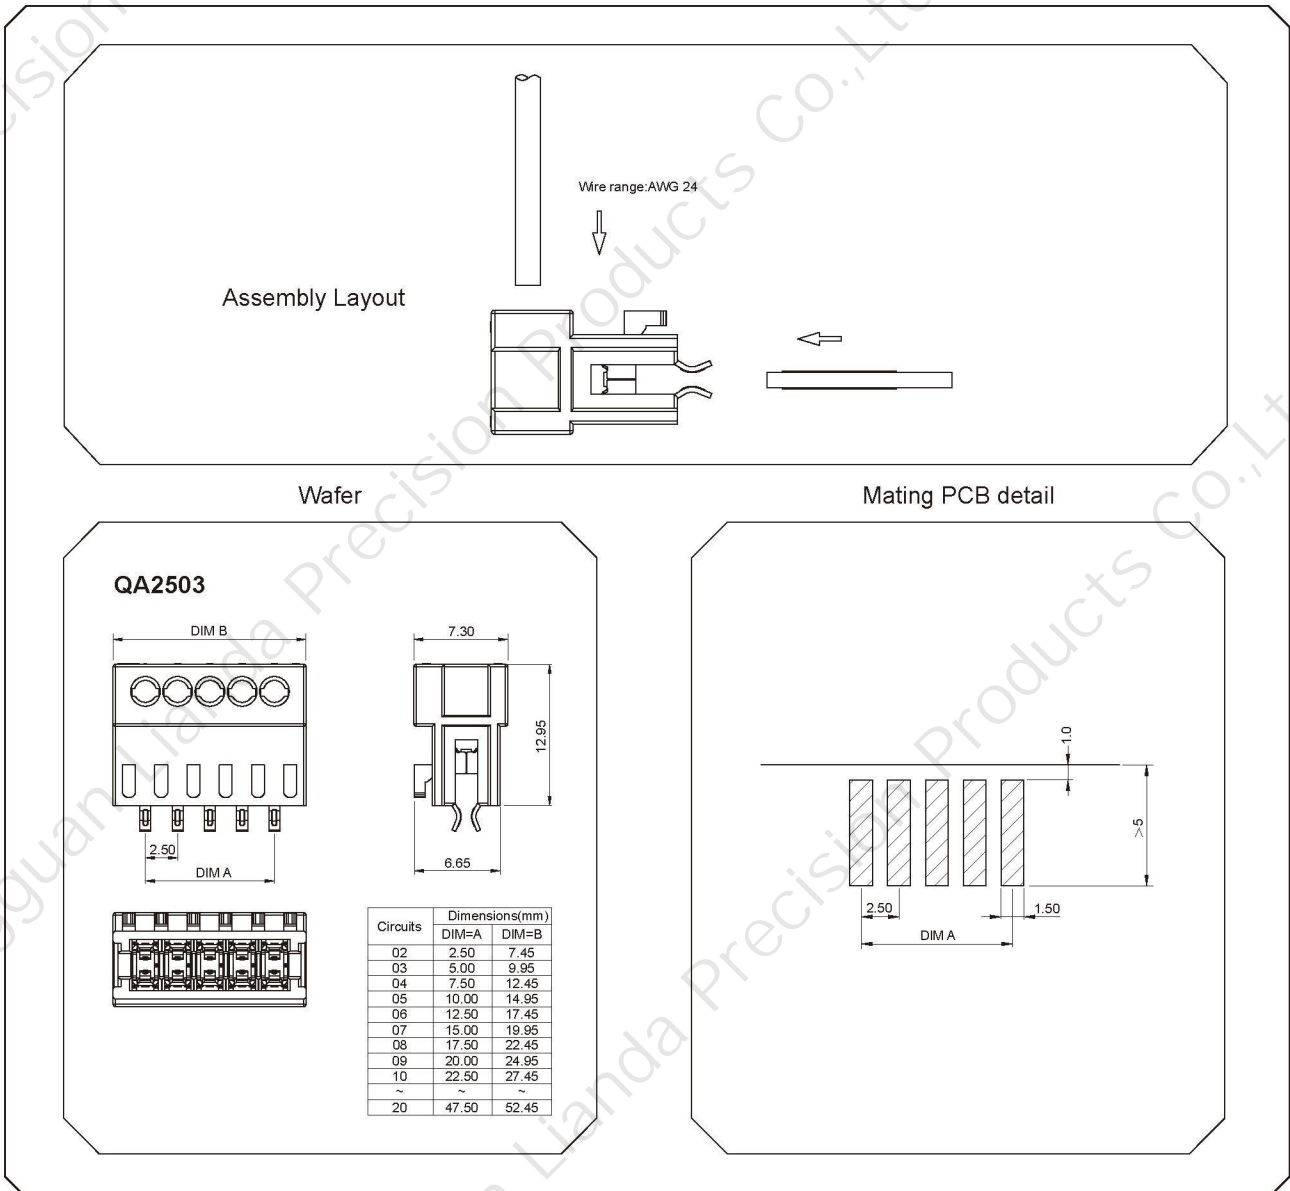

WIRE TO BOARD

BOARD TO BOARD

WIRE TO WIRE

FPC SERIES

THR SERIES

LIGHTING SERIES

OTHER SERIES