
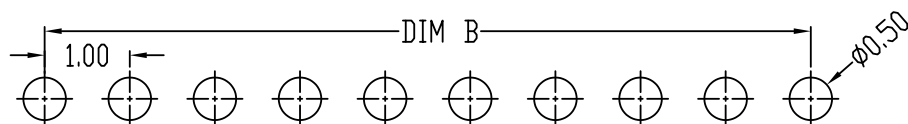

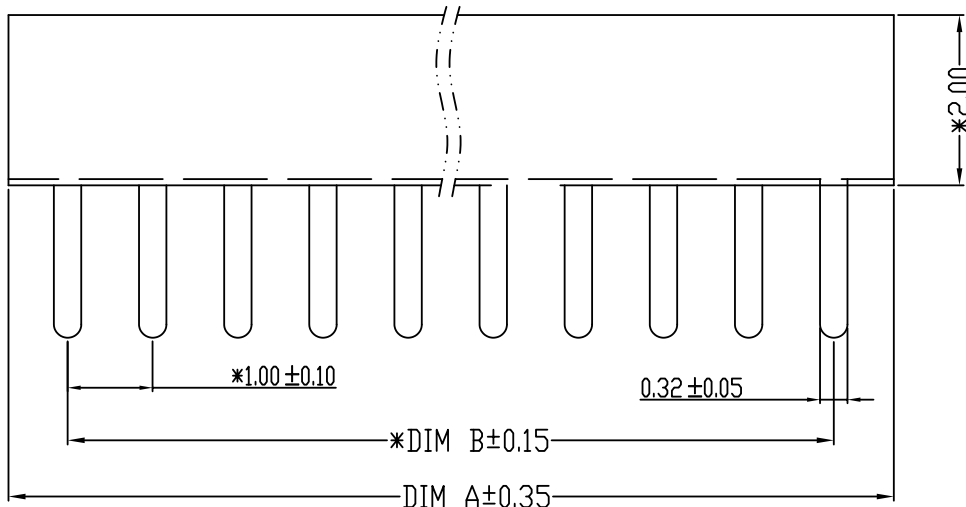


HSF RoHS

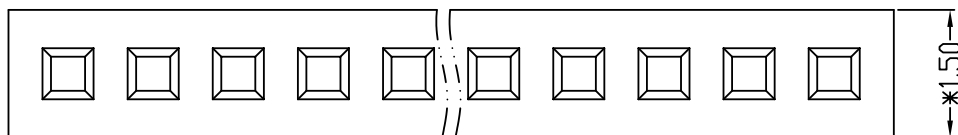

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°


REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	05/13-'22	LZR

Specifications 规范

- Current Rating: 1.0Amps
额定电流:1.0安培
- rated voltage: 125V AC/DC
额定电压:125V AC/DC
- Insulation Resistance: 1000 MΩ Min
绝缘电阻:最小1000 MΩ
- Dielectric withstanding Voltage: 500V AC
耐电压:500V AC
- Contact Resistance: 20 mΩ Max
接触电阻:最大20 mΩ
- Operating Temperature: -40° C to+105° C
工作温度:-40° C ~ +105° C
- Contact Material: Phosphor Bronze
接触材质:磷铜
- Plating: Au G/F Over NI
电镀:金 G/F 和镍底
- Insulation Material: PA6T, UL94V-0
绝缘材料:PA6T, UL94V-0
- Marked "*" symbol are major dimensions
标有 "*" 符号为主要尺寸
- Packing: bag+box;
包装:袋+盒;

PIN	DIM A	DIM B
1x1P	1.40	1.00
1x2P	2.40	2.00
1x3P	3.40	3.00
1x4P	4.40	4.00
1x5P	5.40	5.00
1x6P	6.40	6.00
1x7P	7.40	7.00
1x8P	8.40	8.00
1x9P	9.40	9.00
1x10P	10.40	10.00
1x11P	11.40	11.00
1x12P	12.40	12.00
1x13P	13.40	13.00
1x14P	14.40	14.00
1x15P	15.40	15.00
1x16P	16.40	16.00
1x17P	17.40	17.00
1x18P	18.40	18.00
1x19P	19.40	19.00
1x20P	20.40	20.00
1x21P	21.40	21.00
1x22P	22.40	22.00
1x23P	23.40	23.00
1x24P	24.40	24.00
1x25P	25.40	25.00
1x26P	26.40	26.00
1x27P	27.40	27.00
1x28P	28.40	28.00
1x29P	29.40	29.00
1x30P	30.40	30.00
1x32P	32.40	31.00
1x33P	33.40	32.00
1x34P	34.40	33.00
1x35P	35.40	34.00
1x36P	36.40	35.00
1x37P	37.40	36.00
1x38P	38.40	37.00
1x39P	39.40	38.00
1x40P	40.40	39.00

Ordering Information

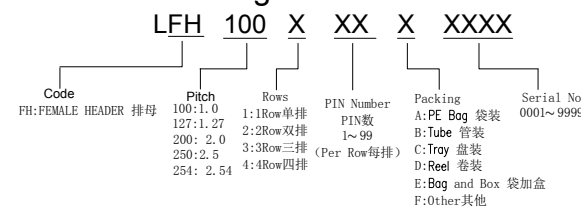

LDCONN 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

TITLE	PH1.0X2.0 1X15P 180度排母 U型	DRAWN BY	LZR	05/13-'22
PART NO.	LFH100115E0001	CHECKED BY	工程 7-11-22 朱磊	
DRAWING NO.		APPROVED BY	工程 7-11-22 周晓	
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4