
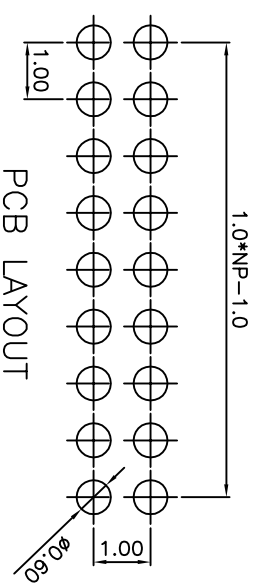
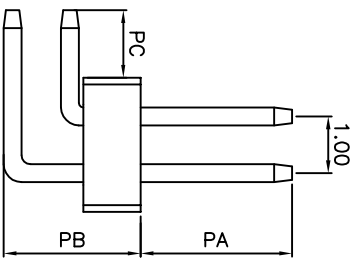
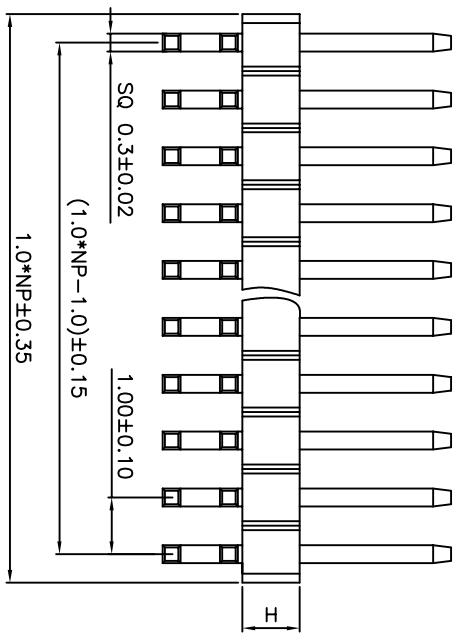


HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

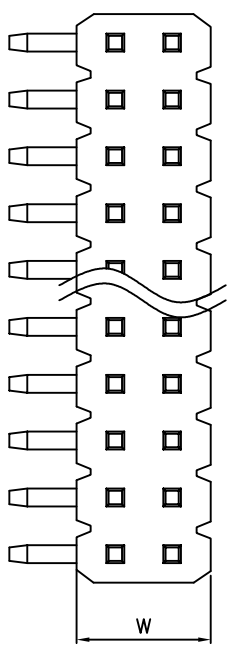

- ### Specifications
- Current Rating: 0.75Amps
 - Insulation Resistance: 1000 MΩ min.
 - Dielectric withstanding Voltage: 500V AC/DC
 - Contact Resistance: 30 mΩ max.
 - Operating Temperature: -40°C to +105°C
 - Contact Material: Brass
 - Insulation Material: As follows, UL94V-0, Black
 - Plated: Au Over Ni

Ordering Information

L202 XX -XX I X XX X

Insulation Height*Width Per Row: 1-50P
 Option: 10=1.0*3.2, 15=1.5*2.3, 15=1.5*3.2
 Insulation Material: 0=0.8" Gold, 1=Au1" Gold, 2=P/PS, 3=NV6T, 4=LCP, 5=NV66, 6=Customized, 7=NV46, 8=NV9T
 Contact Plating: 0=0.8" Gold, 1=Au1" Gold, 2=Au1.5" Gold, 3=Au2" Gold, 4=Au3" Gold, 5=Au5" Gold, 6=Customized, 7=Gold/Tin, 8=Tin
 Serial NO. 01-69
 Packing: A=PE Bag, B=Tube, C=Tray, D=Reel

Dimension antitheses list				
ITEM	PC	PB	PA	H
Standard	1.50	2.80	3.00	1.00
Alternative				

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINER	ANGLES
.0	± 0.30	$0.^\circ \pm 3^\circ$
.00	± 0.20	$.0^\circ \pm 2^\circ$
.000	± 0.10	$.00^\circ \pm 1^\circ$

LDCONN 东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD				
TITLE	PHI. 0mm Pin Header Dual Row 90°	DRAWN BY	YTT	16.02.03
PART NO	L20210-XX1XXXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNITE	mm	PAGE 1/1
				SIZE A4